




# Installation information


Aluminum frame, with drywall inlay, for walls and ceilings - System F1 / F2 AK - glued panel

## Tools Required



**Drywall insert with screws on sizes larger than 24" x 24" (610 mm x 610 mm).**



## Framing Guide

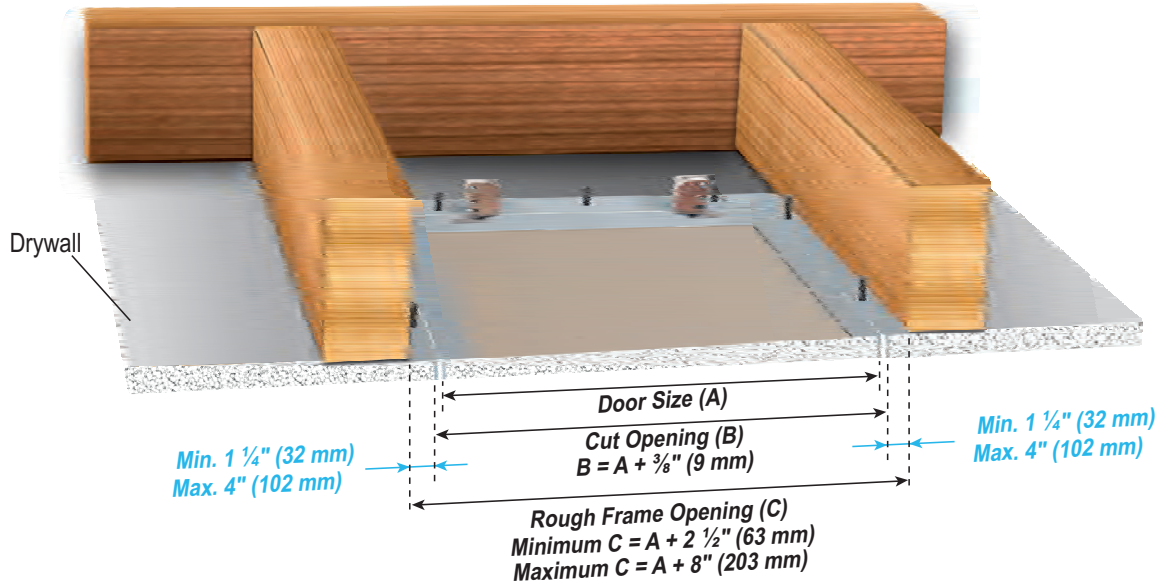

- 1 **Door Size (A):** This is the clear opening of the panel when the door leaf is removed.
- 2 **Cut Opening (B)** is the Door Size (A) +  $\frac{3}{8}'' (9 \text{ mm})$ . This is the size of the opening you will cut into the drywall!
- 3 **Rough Frame Opening (C)** is the measurement from inside stud to inside stud of the surrounding framework.  
Minimum Rough Frame Opening (C) is Door Size (A) +  $2 \frac{1}{2}'' (63 \text{ mm})$

### Standard Ceiling and Walls - stud or joists at 16" (406 mm) center

The illustration shows the maximum size of the frame that fits between joists or studs on standard center.

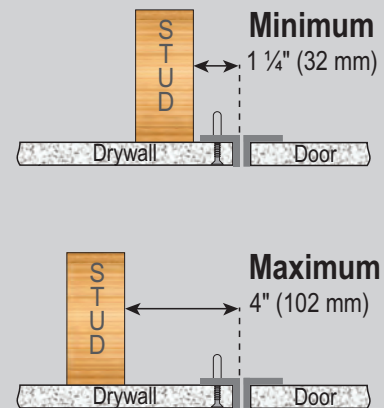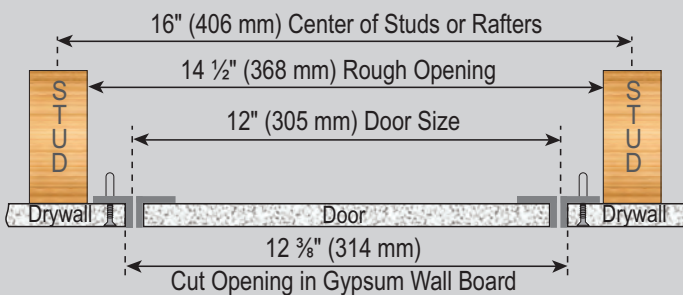

FF Systems, Inc.  
2840 Hunter Street  
Fort Myers, FL 33916

Toll-Free: 1-888-978-1808  
Phone: 239-288-4255 Fax:  
239-288-4251

info@ffsystems.com  
www.ffsystems.com