

Oversized Attic Access Door

- DOOR: 18 gauge cold rolled steel
 FRAME: 16 gauge cold rolled steel
 HINGE: Concealed continuous rod
 LATCH: 1/4 Allen head key
 FINISH: Gray powder paint
 INSULATION: 1-1/2 non-combustible, high temperature
 CERTIFICATION: Warnock-Hersey listed for 2 hrs (standard)
 Warnock-Hersey listed for 3 hrs (with T option)

FIRE-RATED 

CUSTOM SIZING 



BFRD3648DW

BFRD

WIDTH

X

HEIGHT

OPTIONS

STANDARD SIZES (WIDTH & HEIGHT)

36 x 60	40 x 60	48 x 60
---------	---------	---------

OPTIONS

D Double door	T 3-Hour rated
M Mortise lock (1-1/8) prep	C Ceiling application
S T304 Stainless steel	W Wall application

Custom sizes are available. Rough opening is door size.


Tile Ready Access Door

- DOOR: 14 gauge bonderized/galvanized steel
 FRAME: 16 gauge bonderized/galvanized steel
 HINGE: Cabinet type
 FINISH: None
 CERTIFICATION: UL listed B label for 1-1/2 hrs

FIRE-RATED 

VERTICAL ONLY 

CUSTOM SIZING 

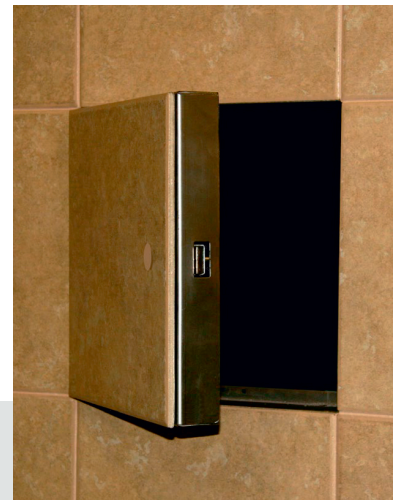

BRUTK1212

BRU

FLANGE

LATCH

WIDTH

X

HEIGHT

MATERIAL

FLANGE

T 1 Flange
W Drywall bead

LATCH

K Knurled knob / key operated latch bolt
M Mortise lock (1-1/8) prep

STANDARD SIZES (WIDTH & HEIGHT)

8 x 8	16 x 16	24 x 24
12 x 12	18 x 18	

MATERIAL

B Bonderized / galvanized
S T304 Stainless steel

Custom sizes are available. Rough opening is door size + 1/4.